

CTS TURBO

INSTALLATION GUIDE

CTS Audi B9 S4/S5 Test Pipe / Cat Pipe
CTS-EXH-TP-0009 / CTS-EXH-TP-0009-CAT



20630 Mufford Crescent, Unit #309
Langley, British Columbia V2Y 2V9

www.CTSTURBO.com

WHAT IS INCLUDED

1. CTS Turbo Test Tip/ Cat
2. Exhaust gaskets
3. Nuts, bolts, and washers

**TOOLS REQUIRED**

1. O2 Sensor socket
2. 12mm wrench
3. T-25 torx

**NOTES**

Vehicle used in this guide is a 2017 Audi B9 S4. Always make sure the car is safe to work on. Do not work on a hot motor. We do not accept any liability for incorrect installation or damage during the install.

STEP 1

Begin by removing the engine cover by pulling up.

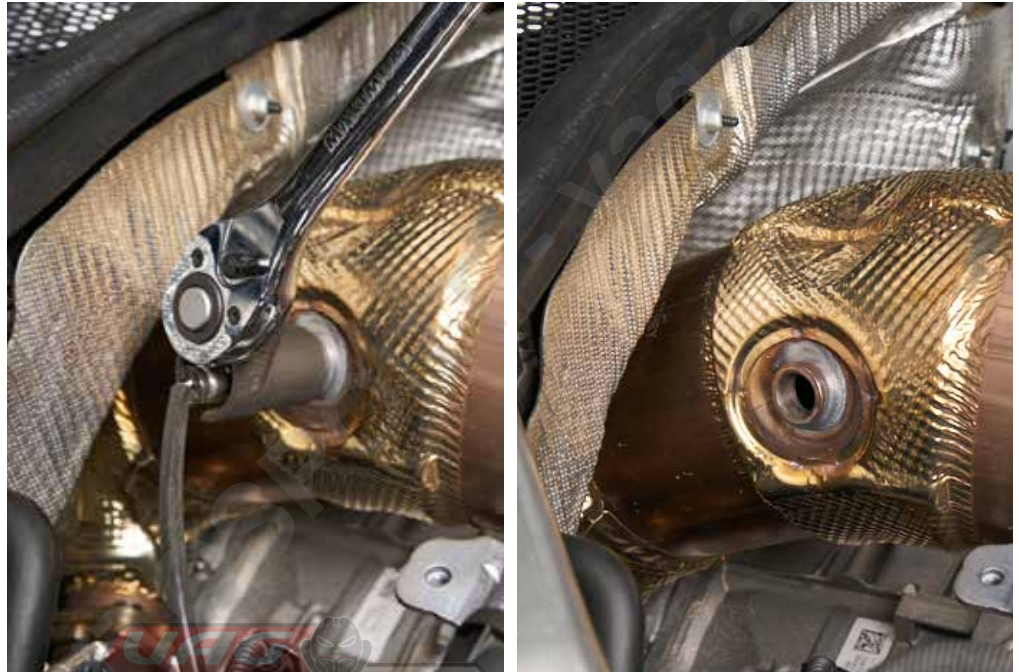
**STEP 2**

Next remove the heat shield by twisting off the plastic stands



STEP 3

Remove the O2 sensor using an O2 sensor socket

**STEP 4**

Remove the top two nuts from each arm of the stock cat with a 12mm socket.



STEP 5

Remove the Vband clamp using a T-25 torx

**STEP 6**

Lift the car and remove the belly pan to gain access to the underside of the cat pipe.



STEP 7

Remove the last nut from each side of the cat pipe using the 12mm socket.



VAG
AUTOSPORT.FR
PIÈCES D'ORIGINE ET PERFORMANCE

STEP 8

Loosen the bottom nut of both exhaust hangers. You should be able to separate the cat from the downpipes.



STEP 9

You should be able to remove the stock cat pipe from the top of the engine bay.



AUTOSPORT.FR
PIÈCES D'ORIGINE ET PERFORMANCE

STEP 10

Install the CTS Test Pipe / Cat Pipe using the steps above in reverse.

You are done!

