



INSTALLATION GUIDE

CTS Resonator Delete MK7/MK7.5 GTI
Factory Exhaust Sytem Only
CTS-EXH-TP-0008



20630 Mufford Crescent, Unit #309
Langley, British Columbia V2Y 2V9

www.CTSTURBO.com

WHAT IS INCLUDED

1. Resonator Delete Pipe
2. 1 Exhaust band clamp



TOOLS REQUIRED

1. Pipe cutter
2. 15mm socket
3. Permanent marker
4. Exhaust hangar pliers

NOTES

Vehicle used in this guide is a 2018 VW Golf GTI. Other cars will follow the same steps. We highly recommend installation using a hoist. Professional installation recommended. Always make sure the car is safe to work on. Do not work on a hot motor/exhaust.

STEP 1

Remove the 4 bolts holding the bracket below the exhaust.

**STEP 2**

Align CTS Resonator Delete Pipe with existing exhaust. Mark cut points with a sharpie.




STEP 3

Use a pipe cutter to cut through the exhaust pipe at the mark you made.

**STEP 4**


Use exhaust hanger pliers to release the exhaust hanger from the rubber mount

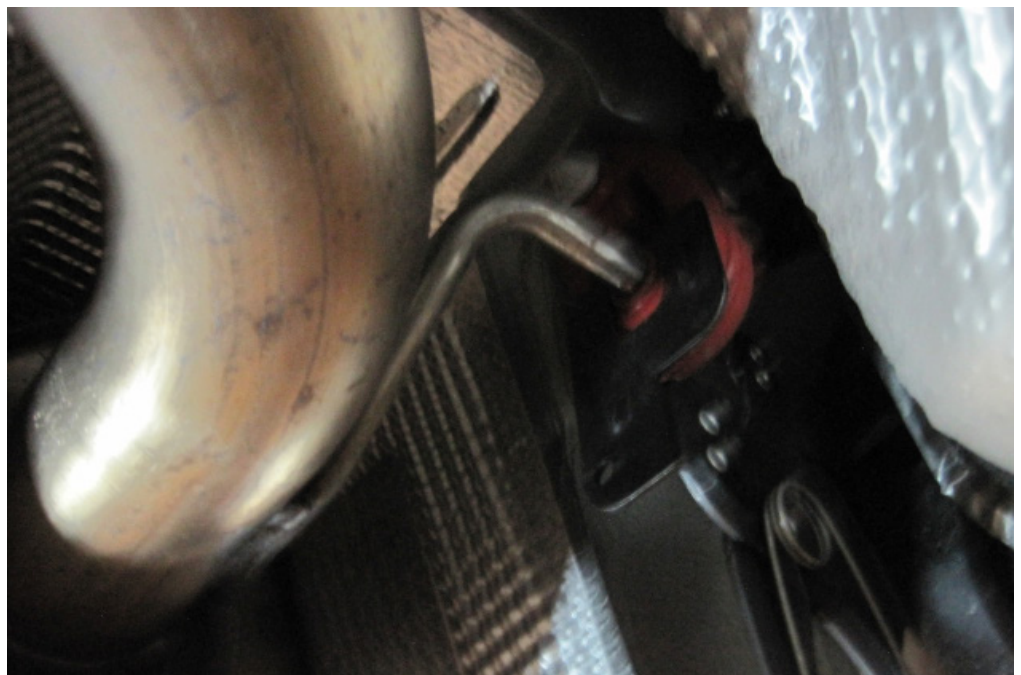

STEP 5

Loosen the stock exhaust clamp and remove resonator pipe


If the stock clamp is in good shape you can reuse it or replace it with one of the ones provided in the kit.

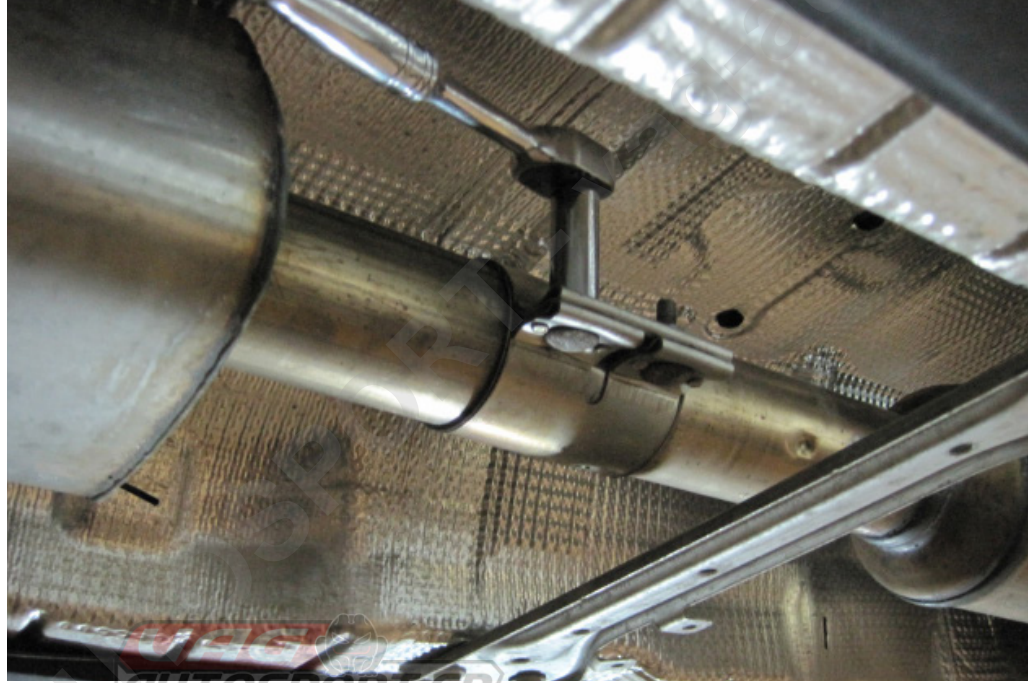

AUTOSPORT.FR
PIÈCES D'ORIGINE ET PERFORMANCE


STEP 6

Insert the CTS pipe into the rubber mount and slide on the exhaust clamps.

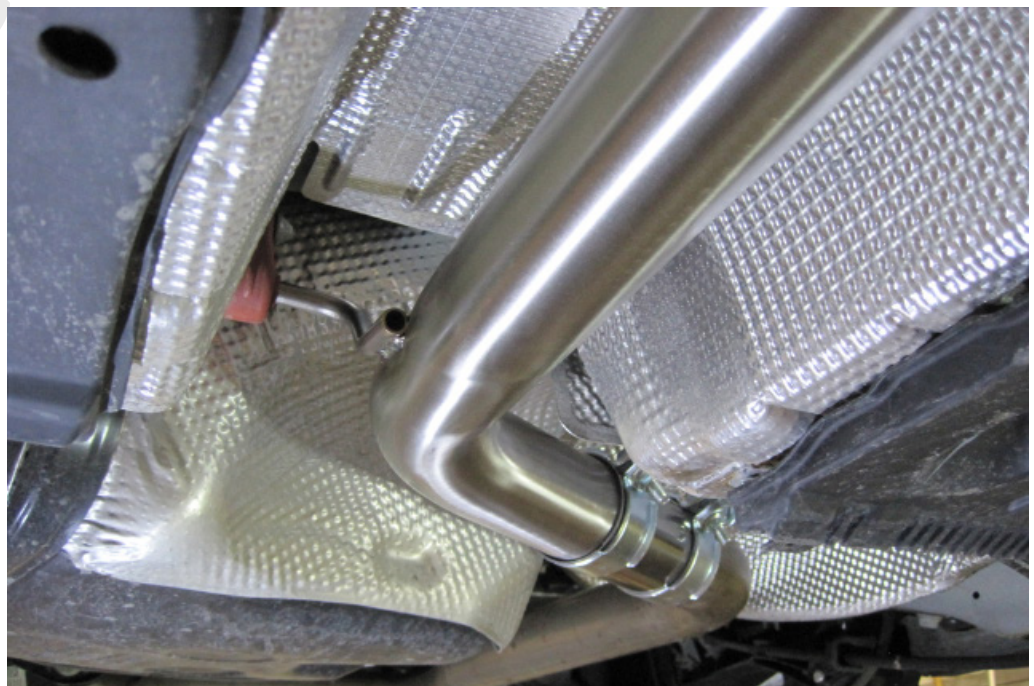

STEP 7

Tighten both the front and rear clamps down with a 15mm socket.

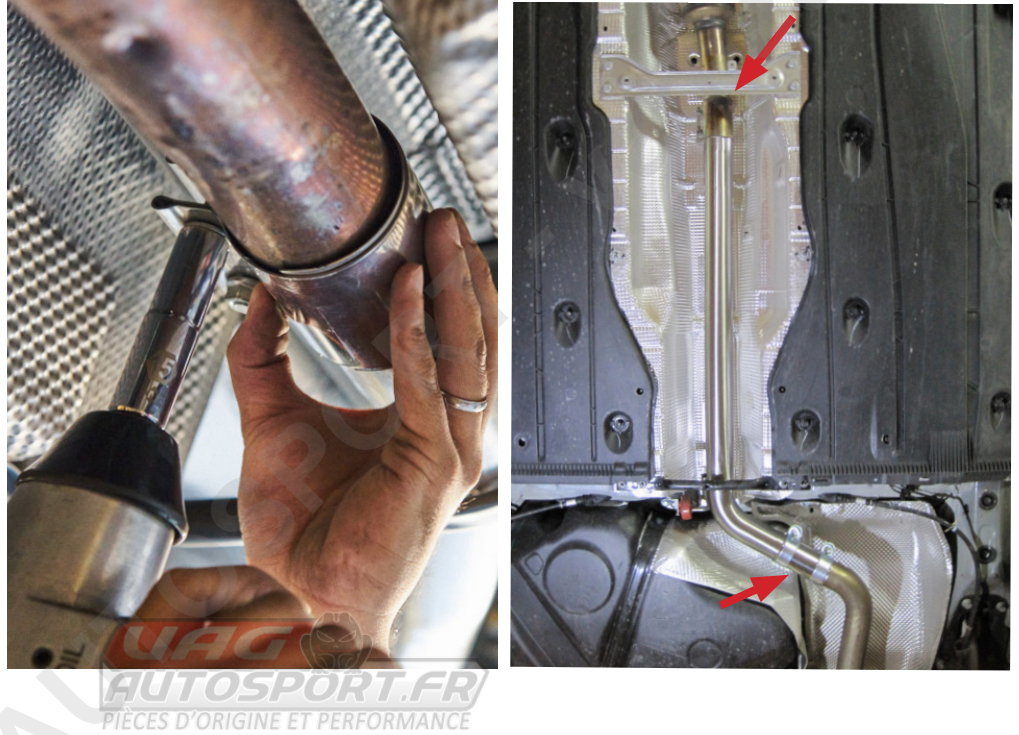

STEP 8

You are done!

